



Seamlessly brilliant video walls.

Extremely Thin Bezels for Virtually Seamless Video Walls Deliver deeper visual impact with extreme narrow bezel video walls from **DigiJupiter**. Featuring a bezel-to-bezel width of just 3.5mm, these 46", 49" and 55" displays will create a virtually seamless picture across multiple screens, for incredible impact. Factory calibration ensures consistent, natural color, while non-glare glass makes sure bright reflections don't get in the way of your beautiful message.



Key Features

- 
Bezel-to-Bezel Measurement of 3.5mm
 Create virtually seamless video walls and deliver deeper visual impact. Extreme narrow bezel video walls feature a bezel-to-bezel width of just 3.5mm, for a near-seamless and captivating picture across multiple screens without interruption.
- 
Achieve Brilliant, Glare-Free Picture Quality
 Combined with a bright, non-glare panel, the extreme narrow bezel video wall delivers memorable content even under ambient light.
- 
Reliable 24/7 Continuous Long-Term Operation
 With continuous 24/7 operation, you can deliver vivid messages around the clock, without worrying about darkening panels.
- 
Conformal Coating
 The product can be often unavoidably exposed to dust and water during maintenance. Conformal coating on major circuit board eliminates such circumstances by protecting it against dust, iron powder, humidity, etc.
- 
Clear View with Non-glare Coating
 Viewers can be annoyed by unnecessary reflections when watching a screen under brightly lit conditions. The DJS series has resolved such inconveniences by increasing the level of haze, which enhances visibility and text readability.
- 
Wide Viewing Angle
 Panel technology provides better control of the liquid crystals, which in turn allows the screen to be viewed at virtually any angles. So it delivers stable and accurate colors no matter where viewers are.

DigiJupiter



Extreme Narrow Bezel Video Wall Displays



			DJS-ULS46	DJS-ULG49	DJS-ULG55
Panel	Diagonal Size	Class	46"	49"	55"
	Type		LED	LED	LED
	Resolution		1920 x 1080	1920 x 1080	1920 x 1080
	Pixel Pitch (mm)		0.53mm (H) x 0.53mm (V)	0.56mm (H) x 0.56mm (V)	0.63mm (H) x 0.63mm (V)
	Active Display Area (mm)		1018.08mm x 572.67mm	1073.8mm x 604mm	1209.6mm x 680.4mm
	Brightness		500 nits	450 nits	500 nits
	Contrast Ratio		3000:1	1300:1	1400:1
	Viewing Angle (H/V)		178/178	178/178	178/178
	Response Time (G-to-G)		8ms	12ms	8ms
	Display Colors		8 bit - 16.7M	8 bit - 16.7M	8 bit - 16.7M
	Color Gamut		72%	72%	72%
	Panel Orientation		Landscape / Portrait	Landscape / Portrait	Landscape / Portrait
	Display Color		1677	1677	1677
Operation Hour		24/7	24/7	24/7	
Connectivity	Input	RGB	VGA, CVBS, DVI-D	VGA, CVBS, DVI-D	VGA, CVBS, DVI-D
		Video	HDMI	HDMI	HDMI
		HDCP	HDCP	HDCP	HDCP
	External Control		RS232 (In / Out), RJ45	RS232 (In / Out), RJ45	RS232 (In / Out), RJ45
External Sensor		(IR, ISP),RJ45	(IR, ISP),RJ45	(IR, ISP),RJ45	
Power	Type		Internal	Internal	Internal
	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Power Consumption	Max(W) Off Mode	150W < 0.5W	160W < 0.5W	200W < 0.5W
Dimensions	Set Dimension (W x H x D)		1021.98 x 576.67	1077.58 x 607.8	1213.4 x 684.2
	Weight		20kg	24kg	30kg
Operation	Operating Temperature		0°C~ 50°C	0°C~ 50°C	0°C~ 50°C
	Humidity		10~80%	10~80%	10~80%
Features	Key		Extreme Narrow Bezel	Extreme Narrow Bezel	Extreme Narrow Bezel
	Language		Support Multi-language		

Connectivity

- HDMI IN
- DVI-D
- VGA
- CVBS OUT
- CVBS IN
- ISP/IR
- RS232 IN
- RS232 OUT
- AC Power IN

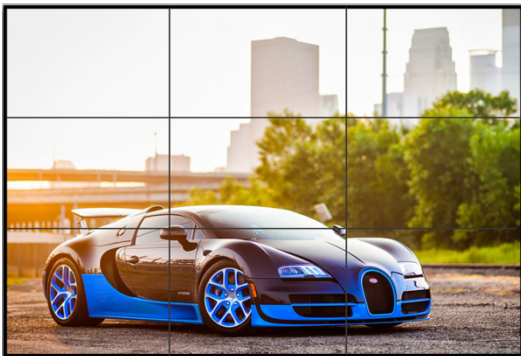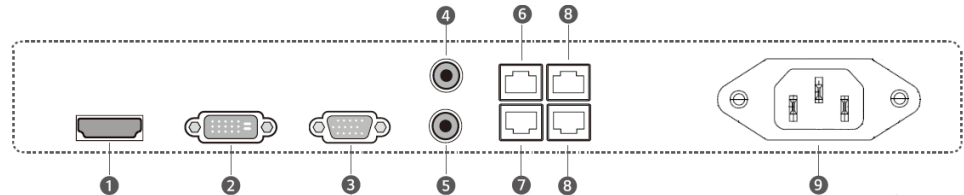

Learn More
Contact Us

www.Digijupiter.com
Hsu@digijupiter.com

