

### Digital Signage Extender DJE-T011



#### COTENTS

1	Overview	. 3
1.1	Introduction	. 3
1.2	Features	. 3
2	Profile	.4
2.1	Interfaces	4
3	Specification	5
4	Application	6

#### **Revision history**

Revision	Revision date	Principle changes
V1.0	May. 2018	Create V1.0

Copyright © 2017 Digi-Jupiter TECH Co., Ltd. All rights reserved.

## 1 Overview


#### 1.1 Introduction

Digijupiter DJP-T011 wireless 1080P HD transmission kit can wirelessly transmit any High-Definition content from your set-top-box, Blu-ray player, or HDMI ready computer placed anywhere in the house, to the HDTV. It is the best way to stream your 1080P content wirelessly.

#### **Features**

Transmit all your HDMI-compatible, digital video signals wirelessly form one display or playback device (e.g. PC, DVD or Blu-ray player) to a receiver terminal (e.g. monitor or TV). Digijupiter HDMI transmission kit offers maximum flexibility and comfort.

- Transmit uncompressed 1080P video to TV wirelessly
- Plug & play, no software installation required, no setting required
- Stream HD 1080P video pass through
- Stream 3D video pass through
- Support the highest rate 1.485G an TDMS clock up to 148.5MHz
- Transmission distance up to 30 meters

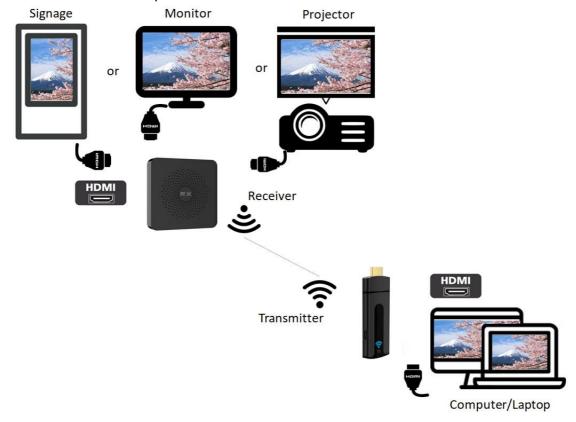

## 2 Profile

#### 2.1 Interfaces

■ Transmitter & Receiver



# 3 Specification

Technical				
Technical	Wireless HD1.1			
standard				
Bandwidths	4Gbps			
Middle	60GHz (59~66GHz)			
frequencies				
RF power	10dBm			
Security	HDCP2.2			
agreement				
Delay time	<5ms			
Distance	10m~30m(depends on version)			
Resolution	Up to 1080P @60Hz			
HDMI	HDMI1.4			
Average Power	TX is 1.5W RX is 2.5W			
Power	Micro USB B, 5V-1A			
Temperature	0 - 60°C			
TX size	95x29x16mm			
RX size	87x87x21mm			

# 4 Application

